

# Fortan LED IP44



## Bruksområde

- Generell utenpåliggende armatur med PMMA opal skjerm.

## Armaturl

- Hvitlakkert (RAL9003) metall.

## Optikk

- Opal skjerm.

## Bestykning



- LED 3000°K eller 4000°K.
- CRI>80.
- Elektronisk forkobling.

## Varianter

- Digital dimming (DALI).
- Endelokk for montering i serie.



Art. nr.	W	Lumen	Kelvin	L	B	H
428100	16	1300	3000	630	173	64
428101	24	1950	3000	630	173	64
428102	32	2400	3000	1285	173	64
428104	48	3900	3000	1285	173	64
428103	40	2900	3000	1585	173	64
428105	60	4550	3000	1585	173	64

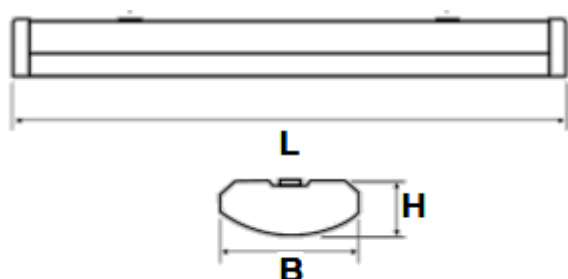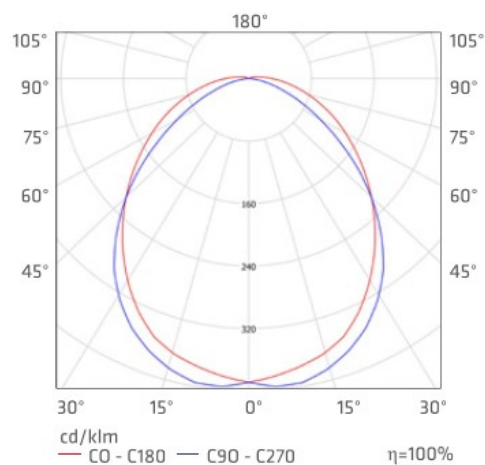

**Armaturlen skal aldri tilkobles byggestrøm.  
 Armaturlen skal primært megges med 250V DC.  
 Hvis det benyttes 500V må fasene sammenkobles.**